

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2000-038242

(43)Date of publication of application : 08.02.2000

(51)Int.Cl. B65H 21/00
H05K 13/02

(21)Application number : 10-208867

(71)Applicant : KATOO SEIKO:KK

(22)Date of filing : 24.07.1998


(72)Inventor : KATO KOUJI

(54) CONNECTION METHOD FOR TAPING OF SQUARE HOLE PUNCH CARRIER SHAPE AND TAPE FOR CONNECTION

(57)Abstract:

PROBLEM TO BE SOLVED: To connect taping of a square hole punch carrier shape simply and securely without obstructing is smooth supply.

SOLUTION: This tape for connection is constituted by a basic material tape 2, a connection tape 3 based on a mold release face of the basic material tape 2, and a protection tape 4 which covers the connection tape 3 and is stuck on the basic material tape 2 and the connection tape 3. The connection tape 3 is provided with a first connection tape 31 in which feed holes agreeing with feed holes of taping shaped like square punch carrier are formed at the same feed hole pitch and which can be stuck on a top face of the taping of a square hole punch carrier shape without interfering with a top cover tape, a second connection tape 32 which can be bonded on the top cover tape, and a third connection tape 33 which can be bonded on a bottom cover tape.

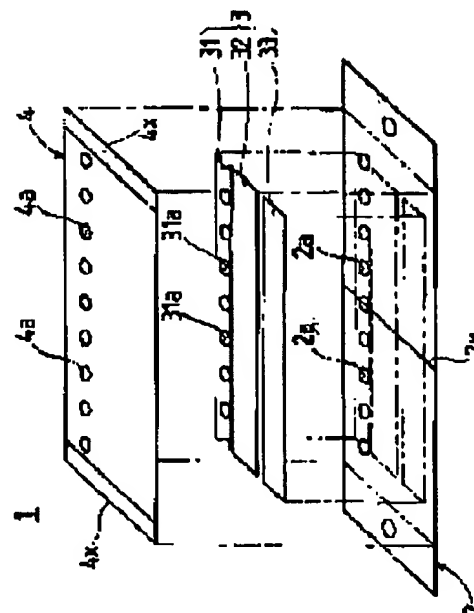

LEGAL STATUS

[Date of request for examination] 09.06.2000

[Date of sending the examiner's decision of rejection] 16.04.2002

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office